

UNIT FEATURES:

- Frameless, Stationary Tempered Glass Panel
- Reversible right or left installation
- Mounting hardware options (U-Channel or Clamps)
- Custom sizing and fabrication

SPECIFICATIONS:

Aluminum: U-Channel is fabricated with extruded 6000 series billet
 Glass Thickness: 3/8" (10mm) to 1/2" (12mm)
 Clamps: Solid forged brass

CODE COMPLIANCE:

- ANSI Z.97.1 (Tempered Glass)
- CPSC 16CFR 1201 II (Glazing Materials)
- ASTM C1048-85 (Anodized Finishes)
- USFS DD-G-1403B (Tempered Glass)
- SGCC Certified

FINISHES AVAILABLE:

- CH - Chrome
- NI - Brushed Nickel
- MB - Matte Black
- RB - Roman Bronze
- DA - Dark Anodized Oil-Rubbed Bronze
- GO - Gold (brass)
- PN - Polished Nickel
- CB - Champagne Bronze

GLASS:


- 3/8" clear standard
- Additional colors/patterns available

HARDWARE:

- U-Channel or Clamps
- Optional Robe Hook
- Optional Towel Bar



DRAWINGS NOT TO SCALE

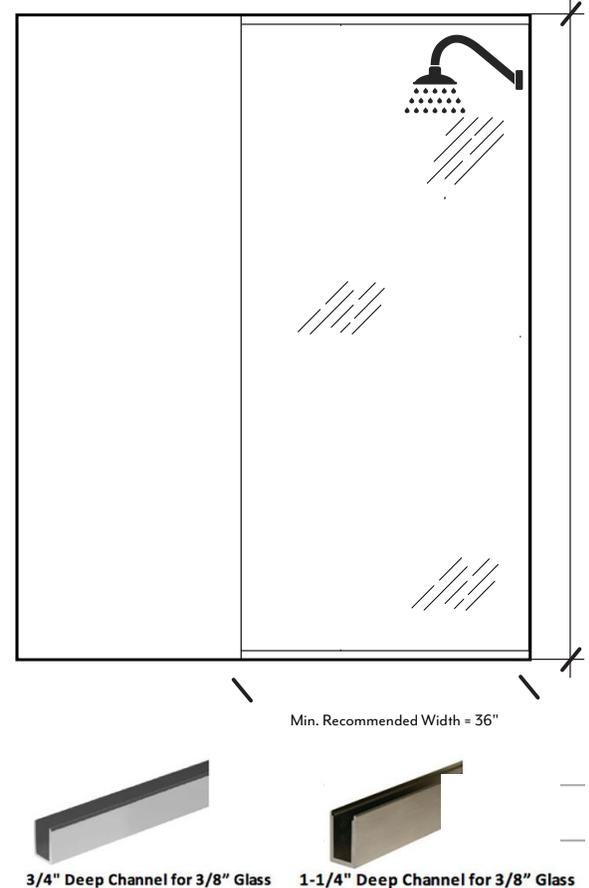

SIDE ELEVATION

DIMENSIONS

