

# RESILIENT TILE FLOORING - QUIETLOK® PLUS

COLLECTION/PATTERN: CHARRED OAK - STORM

PRODUCT ID: QL812216




## TECHNICAL SPECIFICATIONS

SIZE	220mm x 1510mm (8.66" x 59.45")
WEAR LAYER THICKNESS	0.55mm (22MIL)
TOP LAYER THICKNESS	2mm (0.08")
OVERALL THICKNESS	8mm (0.32")
CORE THICKNESS	4mm (0.16")
CORE MATERIAL	QUIETCORE®
PAD THICKNESS	2mm (0.08")
EDGE DETAIL	MICRO BEVEL
EMBOSSING	IN-REGISTER
FINISHING	GUARDLOK® SURFACE PROTECTANT
SQ. FT./CARTON	28.60 (2.66m <sup>2</sup> )
PIECES/CARTON	8
CARTONS/PALLET	52
LIMITED WARRANTY	14 YEAR COMMERCIAL
RATINGS	STC 62 & IIC 69



## PRODUCT COMPONENTS

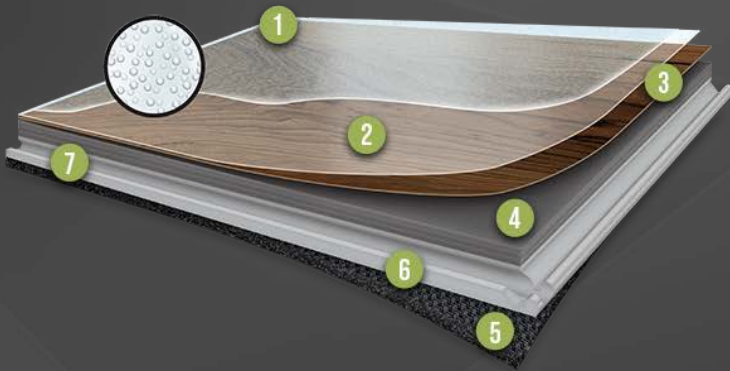

- 1 GUARDLOK® OVERLAY
- 2 CLEAR VINYL WEAR LAYER
- 3 HIGH-RESOLUTION PRINTED DECORATIVE FILM
- 4 2mm (0.08") SOLID VINYL TOP LAYER
- 5 INTEGRAL SOUND MITIGATING UNDERLAYMENT
- 6 CLIKLOK® SYSTEM TECHNOLOGY
- 7 QUIETCORE® TECHNOLOGY

MGROUP™

MERIDIEN HOUSE | 203 NORTH LEWIS STREET | LAGRANGE, GA 30240 USA  
OFFICE: 706.350.4300 | INFO@QUIETLOK.COM | WWW.QUIETLOK.COM

REV. DATE - 07/2023

