UNIT FEATURES:

- Double Bypass Header
- Frameless Enclosure
- 5/16" Clear Tempered Glass
- 60" Top Track Mounted
- 76" Side Rails
- True Bypass Doors
- Flush Pull & Towel Bar

CODE COMPLIANCE:

- ANSI Z.97.1 (Tempered Glass)
- ASTM C1048-85 (Tempered Glass)
- CPSC 16 CFR 1201 (Tempered Glass)
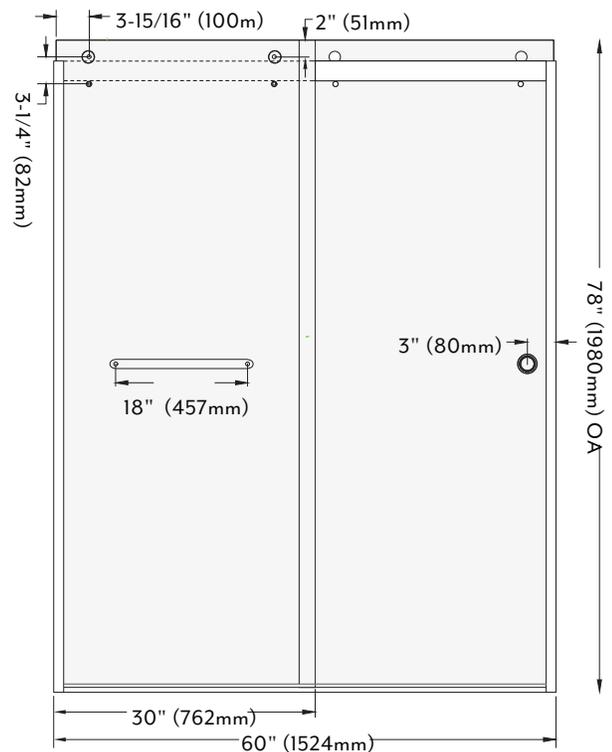- SGCC Certified

FINISHES AVAILABLE:

- Matte Black
- Polished Chrome
- Brushed Stainless
- Satin Brass

HARDWARE

INCLUDED INSTALLATION HARDWARE

Dimensions:
- 3-15/16" (100m)
- 2" (51mm)
- 3-1/4" (82mm)
- 18" (457mm)
- 3" (80mm)
- 78" (1980mm) OA
- 30" (762mm)
- 60" (1524mm)

SIDE ELEVATION   DIMENSIONS

3" (77mm)

78" (1980mm)

1" (25mm)

3" (77mm)

18-3/4" (476mm)

2-1/4" (63mm)

5/16" (8mm)

1-3/8" (34mm)

2-3/8" (60mm)

3/16" (5mm)

3/16" (5mm)

3/4" (19mm)

1" (25mm)

2-7/8" (73mm)

2-7/8" (73mm)

7/8" (22mm)

3-1/16" (79mm)